


- Connector Specifications
1. 1394 Series - IEEE Firewire
 2. Female receptacle
 3. 6 Pin
 4. Finish: Gold Flash
 5. Top Entry (180 degrees)
 6. ROHS Compliant

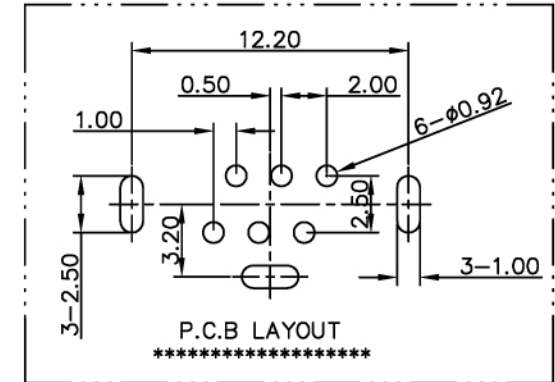

3	INSULATOR	P.B.T	UL94-V0, BLACK	1
2	CONTACT	BRASS	T=0.25mm, GOLD FLASH	6
1	SHELL	BRASS	T=0.4mm, NICKEL PLATED	1
NO.	DESCRIPTION	MATERIAL	FINISH	QTY

P1	P2	COLOR	LENGTH
△			
△			
△			
△	06/22/2007		RELEASE FOR PRODUCTION
REV	REVISIONS DATE	DESCRIPTION	

CUSTOMER APPROVED		TOLERANCE UNLESS OTHERWISE SPECIFIED	UNIT: mm
DRAWING:	Tom 06/22/07'	.X ±0.30	.X' ±
CHECKED:	Ray 06/22/07'	.XX ±0.20	.X' ±
APPROVED:	Paul 06/22/07'	.XXX±0.10	.XX' ±

PRODUCT:	
IEEE 1394 6PIN FEMALE 180° DIP	
MATERIAL: SEE TABLE	
FINISH: SEE TABLE	
SHEET 1 OF 1	SCALE 3/1

CYPRESS INDUSTRIES www.cypressindustries.com			
DRW. NO.	F1394-T01	PART NO.	CC1394-32007-30X
CUSTOMER NAME		CUSTOMER P/N:	