



REV	DATE	DESCRIPTION	BY	CHKD
1	11/10/00	ISSUED FOR PRODUCTION	...	...
2	11/10/00	...	...	...
3	11/10/00	...	...	...
4	11/10/00	...	...	...
5	11/10/00	...	...	...
6	11/10/00	...	...	...
7	11/10/00	...	...	...



**DESCRIPTION:**  
 WATDM  
 FUNCTION: ...  
 Poling: ...  
 Operating Temperature: -30°C to +80°C  
 Storage Temperature: -10°C to +80°C  
 ELECTRICAL:  
 Maximum Inrush Current: 10000 amps (100ms) at 240V AC  
 Maximum Voltage: 240V AC / 1-phase  
 Contact Intention: 80 ms at 240V AC  
 100000000  
 Spring Force: 30000 (dynes) Min  
 Limiting Force: 25000 (dynes) Min  
 Duration: 10000 cycles Min  
 Contact Intention Force: 4200 (dynes) Min  
 100000000

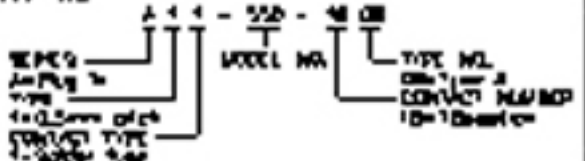

**CYPRESS INDUSTRIES**

REV	DATE	DESCRIPTION	BY	CHKD	APP'D	DATE	REV	DATE	DESCRIPTION	BY	CHKD	APP'D	DATE
A	11/10/00	...	...	...	...	...	1	11/10/00	...	...	...	...	11/10/00