




RoHS Compliant

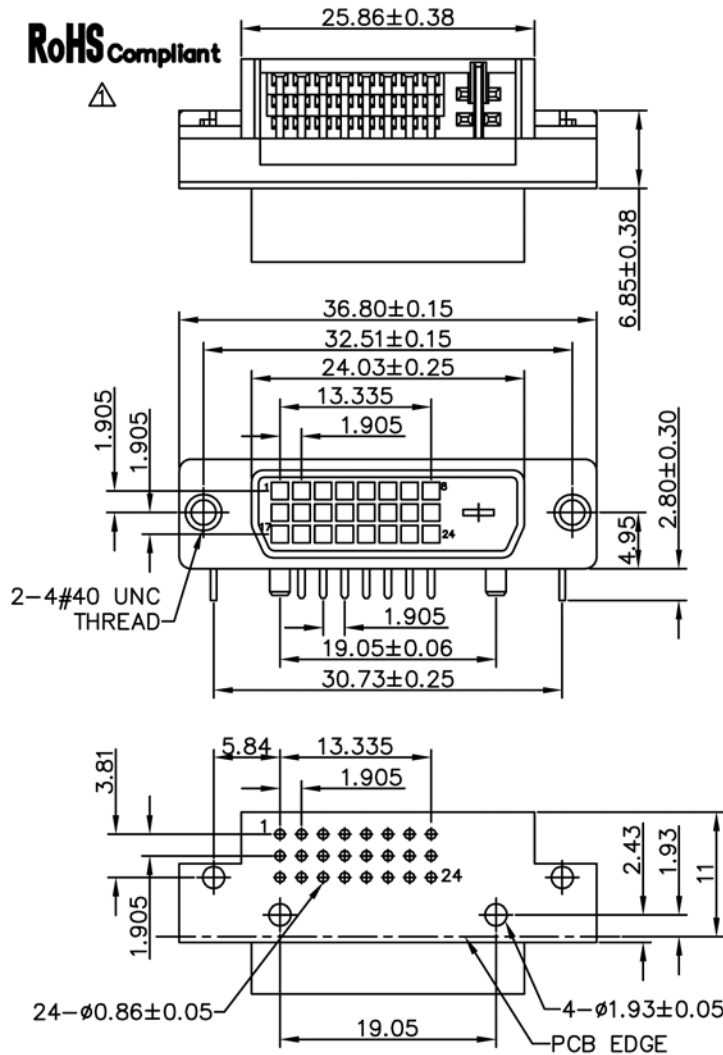

MOUNTING OPTIONS



**PC BOARD MOUNTING PATTERN
COMPONENT SIDE**

Notes:

1. Environmental:
Temp range: -20°C to +85°C
2. Electrical:
Rated: 1.5A @40V AC (rms)
Contact resistance: 20 milliohms max
Insulation resistance: 1000 megohms min
Dielectric withstanding voltage: 500V AC (rms)
3. Mechanical:
Mating force: 10lb (4.5kg) Maximum
Unmating force: 2.2lb (1kg) Minimum, 8.8lb 94Kg Max
4. Material:
Housing: Glass filled thermoplastic, natural, UL 94V-0
Contact: Phosphor bronze
Shell: Zinc alloy, nickel plated
Board lock: Zinc alloy, tin plated

Specifications:


1. 24+1 Positions
2. Digital Visual Interface connector
3. Socket
4. Digital
5. Profile: Right Angle
6. Plating: Gold flash over nickel
7. Mounting: 4-40 Threaded Hole

3	BOARD LOCK	COPPER ALLOY	TIN PLATED	2
3	SHELL	ZINC ALLOY	NICKEL PLATED	1
2	CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL	*
1	HOUSING	PLASTIC	GLASS FILLED THERMOPLAST, NATURAL, UL94V-0	1
NO.	DESCRIPTION	MATERIAL	FINISH	QTY

P1	P2	COLOR	LENGTH
△			
△			
△	06/28/2006		ECR0606026
△	02/26/2004		RELEASE FOR PRODUCTION
REV	REVISIONS DATE	DESCRIPTION	

CUSTOMER APPROVED		/ /	TOLERANCE UNLESS OTHERWISE SPECIFIED	UNIT: mm
DRAWING:	Tom	06/28/06'	.X ±0.30	.X' ±
CHECKED:	Ray	06/28/06'	.XX ±0.20	.X' ±
APPROVED:	Paul	06/28/06'	.XXX±0.10	.XX' ±

Description	DVI Conn Female 24 Pin, Digital, Solder, Right Angle, 4-40 Threaded Hole, RoHS
MATERIAL:	SEE TABLE
FINISH:	SEE TABLE
SHEET 1 OF 1	SCALE 1.5/1



www.cypressindustries.com

DRW. NO.	HDVI-04	Part No
CUSTOMER NAME		CCDVI-24DVISD-R-1