

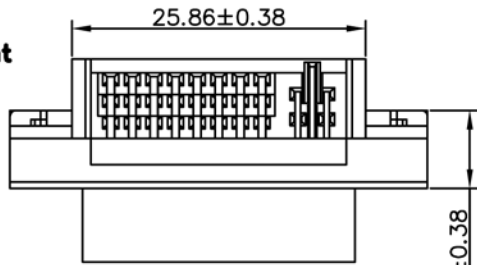



RoHS Compliant

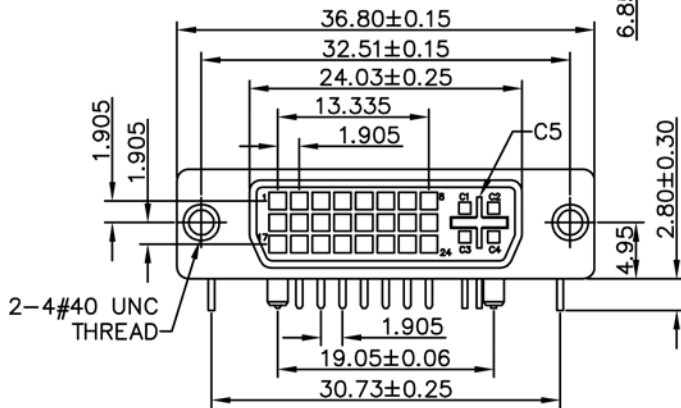

MOUNTING OPTIONS

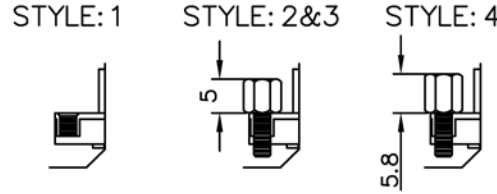


Notes:

- Environmental:**
Temp range: -20°C to +85°C
- Electrical:**
Rated: 1.5A @40V AC (rms)
Contact resistance: 20 milliohms max
Insulation resistance: 1000 megohms min
Dielectric withstanding voltage: 500V AC (rms)
- Mechanical:**
Mating force: 10lb (4.5kg) Maximum
Unmating force: 2.2lb (1kg) Minimum, 8.8lb 94Kg Max
- Material:**
Housing: Glass filled thermoplastic, natural, UL 94V-0
Contact: Phosphor bronze
Shell: Zinc alloy, nickel plated
Board lock: Zinc alloy, tin plated

Specifications:

- 29 Positions
- Digital Visual Interface connector - Integrated (DVI-I)
- Socket
- Digital
- Profile: Cable mount without fixed post
- Plating: Gold flash over nickel
- Mounting: 4-40 Hex Screwlock (5.0mm)
(2 pcs per connector; packaged separate)

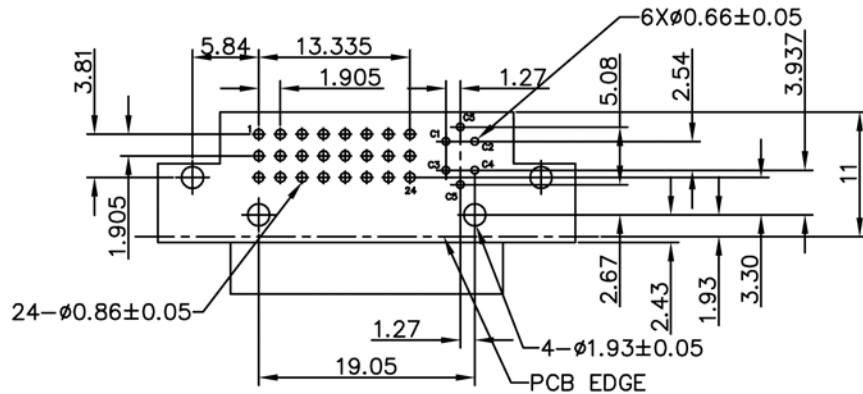


**PC BOARD MOUNTING PATTERN
COMPONENT SIDE**

4	BOARD LOCK	COPPER ALLOY	TIN PLATED	2
3	SHELL	ZINC ALLOY	NICKEL PLATED	1
2	CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL	*
1	HOUSING	PLASTIC	GLASS FILLED THERMOPLAST, NATURAL, UL94V-0	1
NO.	DESCRIPTION	MATERIAL	FINISH	QTY

P1	P2	COLOR	LENGTH
△			
△			
△			
△	03/27/2007		RELEASE FOR PRODUCTION
REV	REVISIONS	DATE	DESCRIPTION

CUSTOMER APPROVED		TOLERANCE UNLESS OTHERWISE SPECIFIED	UNIT: mm
DRAWING:	Tom	03/27/07'	.X ±0.30
CHECKED:	Ray	03/27/07'	.XX ±0.20
APPROVED:	Paul	03/27/07'	.XXX±0.10

Description	DVI Conn Female 29P, Digital, Solder, Right Angle, 4-40 Hex Screwlock, w/ Hex Nuts (Seperate), RoHS
MATERIAL:	SEE TABLE
FINISH:	SEE TABLE
SHEET 1 OF 1	SCALE 1.5/1



www.cypressindustries.com

DRW. NO.	HDMI-06	Part No
CUSTOMER NAME		CCDVI-29DVISIR-A-2