
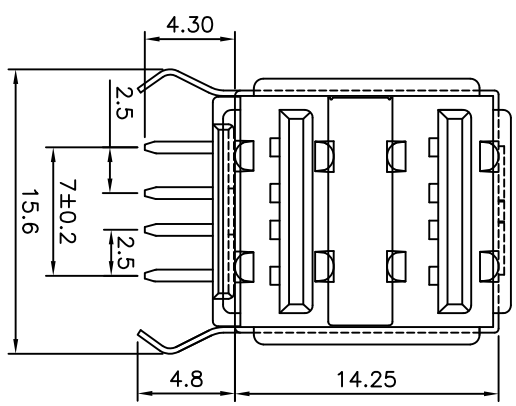
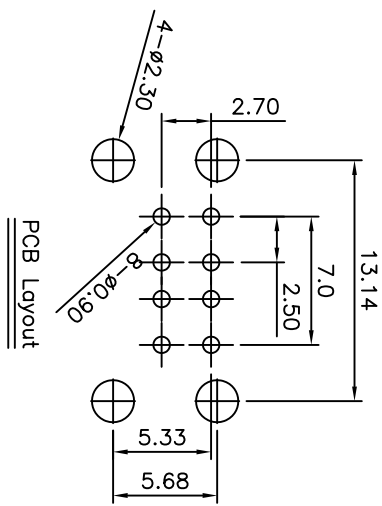
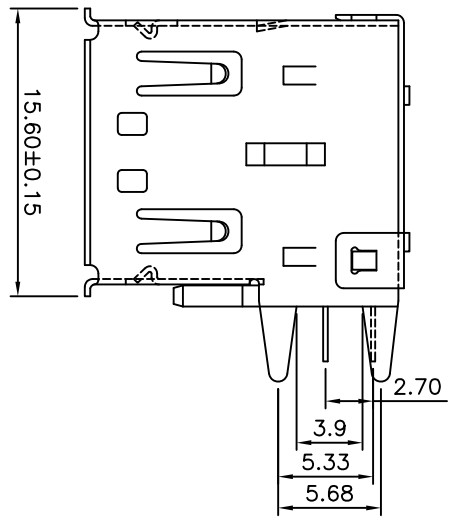


**SPECIFICATION**  
 Contact Resistance: 30Milliohms Max  
 Dielectric Withstanding Voltage: 500V AC At Sea Level  
 Insulation Resistance: 1000Megaohms Min  
 Mating Force: 3.57Kg Max  
 Umating Force: 0.7Kg Min  
 RoHS Compliant

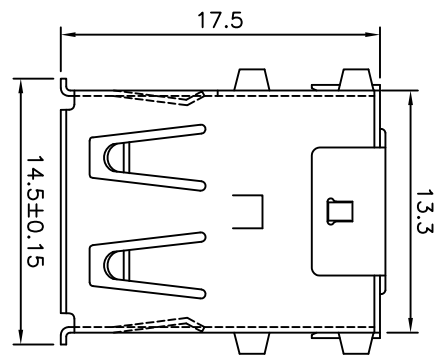

No	Parts	Material	Q'ty	Finishing
5	Housing	PBT	1	White,UL94V-0
4	Cover Shell	Steel	1	Plated Ni
3	Med Clip Slice	Brass	1	Plated Ni
2	Shell	Brass	1	Plated Ni
1	Terminal	Brass	8	Plated Gold In Mating Area Tin On Solder Tails

CATEGORY	APPROVED BY	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
	MEI	X ±0.35
	HZF	.XX ±0.25
	JLT	.XXX ±0.15
	AO	ANG: ±2.00°

PART No.	CHECKED BY	NO.REV.	REVISIONS	CHK	DATE
CCUSBA-32002-15	HZF	AO	NEW RELEASE	HZF	06/16/2008
DRAWING No. USB1X04SRB-H	DRAWING BY JLT			CHK	

SCALE	NONE	REV.	AO

