


SPECIFICATION
 Contact Resistance: 30Milliohms Max
 Dielectric Withstanding Voltage: 500V AC At Sea Level
 Insulation Resistance: 1000Megaohms Min
 Mating Force: 3.5Kg Max
 Umating Force: 0.7Kg Min
 RoHS Compliant

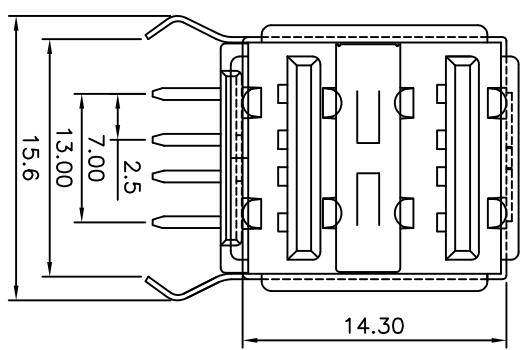

| No | Parts | Material | Q'ty | Finishing |
|----|----------------|----------|------|---|
| 5 | Housing | PBT | 1 | UL94V-0 |
| 4 | Cover Shell | Steel | 1 | Plated Ni |
| 3 | Med Clip Slice | Brass | 1 | Plated Ni |
| 2 | Shell | Brass | 1 | Plated Ni |
| 1 | Terminal | Brass | 8 | Plated Gold In Mating Area Tin On Solder Tails |

| P/N | Insulator |
|------------------|-----------|
| USB1X04SRBS-H | White |
| USB1X04SRBS-BK-H | Black |

| CATEGORY | | APPROVED BY | | UNLESS OTHERWISE SPECIFIED | | NO. REV. | | REVISIONS | | DATE | |
|-------------|------------------|-------------|-----|----------------------------|--------|----------|-------------|-----------|------------|------|--|
| PART No. | CCUSBA-32002-25 | CHECKED BY | MEI | TOLERANCES ARE | | NO. REV. | | | | | |
| DRAWING No. | USB1X04SRBS-XX-H | DRAWING BY | HZZ | .XX | ±0.35 | AO | NEW RELEASE | HZZ | 06/20/2008 | | |
| SCALE | NONE | REV. | HYY | .XXX | ±0.15 | | | CHK | | | |
| | | | AO | ANG: | ±2.00° | | | | | | |



A B C D E F G H I J

A B C D E F G H I J

1 2 3 4 5 6 7 8 9 0