


| | |
|----------|--|
| FILE NO. | |
| PART NO. | |

| | | | | |
|------|--------------------|------------|----|----------|
| REV. | SECTION | DATE | BY | APPROVED |
| X1 | RELEASE TO PRODUCT | 2009/10/20 | | |

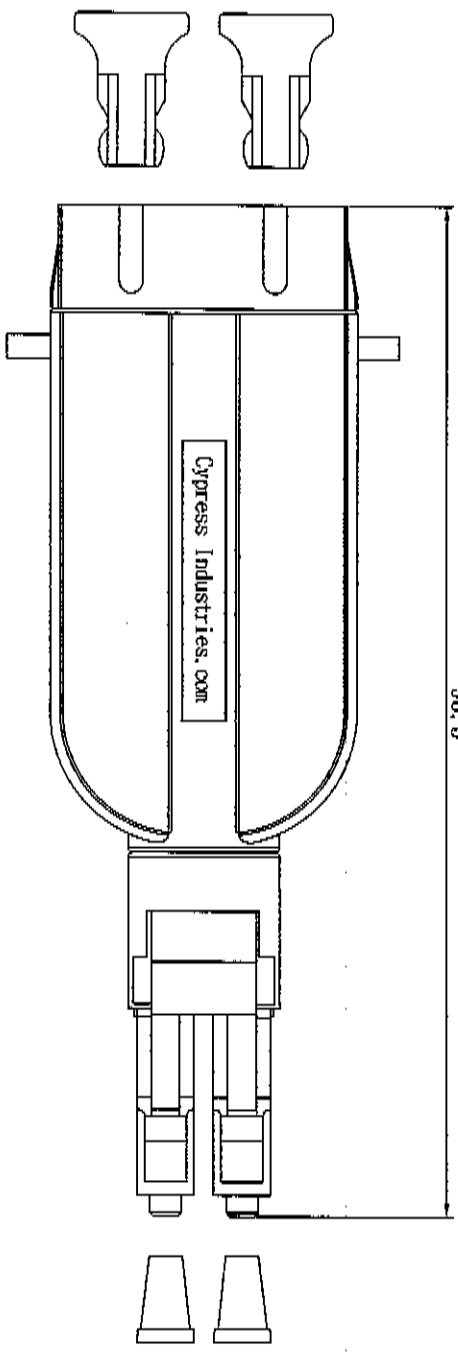

- NOTES:
1. CONNECTOR SPECIFICATION :
SC CONNECTOR IS PER JIS C5973 P04 TYPE CONNECTOR
LC CONNECTOR COMPLIANT WITH EIA/PAS 61754-20 STANDARD.
 2. FIBER SPECIFICATION :
M.M. OPTICAL FIBER IS 50/125 um
TIGHT BUFFER CABLE OD ϕ 0.9mm PVC JACKET
 3. ADAPTOR SPECIFICATION (ϕ 131.0mm):
SPLIT SLEEVE: ZrO2
RETENTION FORCE : 200GF(1.96N)-600GF(5.88N).
INSERTION LOSS: \leq 0.5 dB
WAVELENGTH: 1310nm.
 4. OPERATING TEMPERATURE: -20°C-+75°C
STORAGE TEMPERATURE: -40°C-+75°C
HUMIDITY: 95% R.H. (NON-CONDENSING)
 6. P/N: FA502SCFLCM

| | | | | | |
|----------|----------|----------|-----------|------------|------|
| MATERIAL | QUANTITY | DESIGN | SIGNATURE | DATE | REV. |
| | | 230 EET | Admin HU | 2008/10/20 | X1 |
| | | CHK/CD | KOH/PU | 2009/10/20 | |
| | | APPROVED | NAP/CHH | 2009/10/20 | |
| | | DESIGNER | | | |
| | | MANAGER | | | |

INS. NAME:
 1st 50/125um 4700-5000 Split Buffer Fiber
 Release 10/20/09

SCALE: 1:1 DATE: 10/20/09