


FILE NO.
PART NO.

| REVISIONS | | | | |
|-----------|--------------------|------------|---------|----------|
| REV. | DESCRIPTION | DATE | ECO NO. | APPV'D |
| X1 | RELEASE TO PRODUCT | 2008/10/20 | | NAP CHEN |

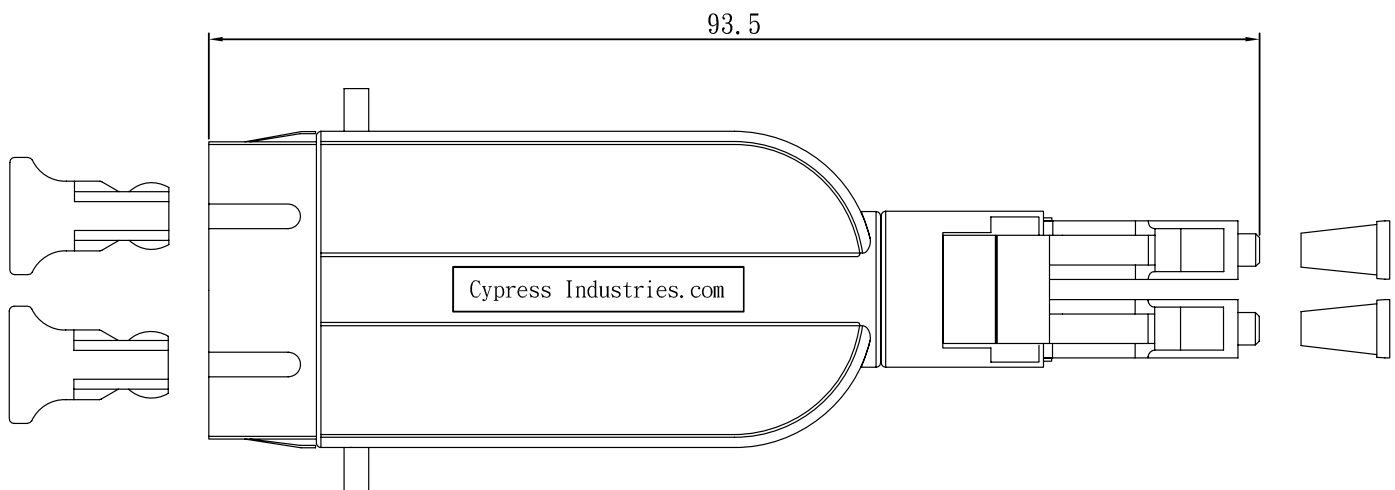

NOTES:

- CONNECTOR SPECIFICATION :
SC CONNECTOR IS PER JIS C5973 F04 TYPE CONNECTOR
LC CONNECTOR COMPLIANT WITH EIA/PAS 61754-20 STANDARD.
- FIBER SPECIFICATION :
S.M. OPTICAL FIBER IS 9/125 μm
TIGHT BUFFER CABLE OD $\phi 0.9\text{mm}$ PVC JACKET
- ADAPTOR SPECIFICATION (@1310nm):
SPLIT SLEEVE: ZrO₂
RETENTION FORCE : 200GF(1.96N)~600GF(5.88N).
- INSERTION LOSS: ≤ 0.5 dB
RETUNE LOSS: ≥ 50 dB
WAVELENGTH: 1310nm.
- OPERATING TEMPERATURE: $-20^{\circ}\text{C} \sim +75^{\circ}\text{C}$
STORAGE TEMPERATURE: $-40^{\circ}\text{C} \sim +75^{\circ}\text{C}$
HUMIDITY: 95% R. H. (NON-CONDENSING)
- P/N: FAS2SCFLCM

| | | | | |
|----------|--|-------------------|------------|---|
| MATERIAL | | SIGNATURE | DATE | Cypress Industries |
| QUANTITY | | DRAWN Adam Hsu | 2008/10/20 | |
| | | PROJECT ENGINEER | | DWG. NAME |
| | | CHECKED TOM FU | 2008/10/20 | SM 9/125um LC(M)-SC(F) Duplex Hybrid Adaptor W/rotatable 90° (Blue Shell) |
| | | APPROVED NAP CHEN | 2008/10/20 | FAS2SCFLCM |
| | | DRAWING MANAGER | | REV. X1 |
| SCALE: F | | | | DATE: _____ SHEET 1 OF 1 |